STELVIO

SPECIFICATIONS

Plank size Length: 1220 mm

Width: 190 mm

Thickness: 7 mm (with integrated underlay)

Box 8 planks

1.854 m² 18.12 kg

Pallet 55 boxes

Structure 1mm IXPE underlay + 5 mm SPC + 1 mm veneer

Coating Mat lacquer Bona

Standard colour Pure Oak
Grading Rustic B+

Top layer thickness 1 mm dry sawn veneer


Bevel V-groove on the 4 sides

Gloss 10 ± 5%

Locking system Drop Lock click system

Type of installation Advised: floating

STRUCTURE

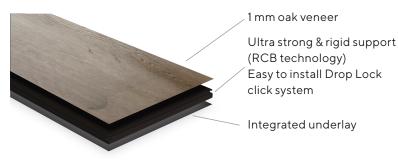

INSTALLATION



PRODUCT CHARACTERISTICS - General

Factor Standard - EN 14041

Density 1590±50 kg/m³

Fire resistance Dfl-S1
Formaldehyde emission E1

Thermal conductivity 0.153 W/mK

Biological durability -

Surface soundness 1.87 N/mm²

Impact resistance -

Floor heating Allowed, according to specific standards

